



TO TRANSISTOR OUTLINE

TO-6-02

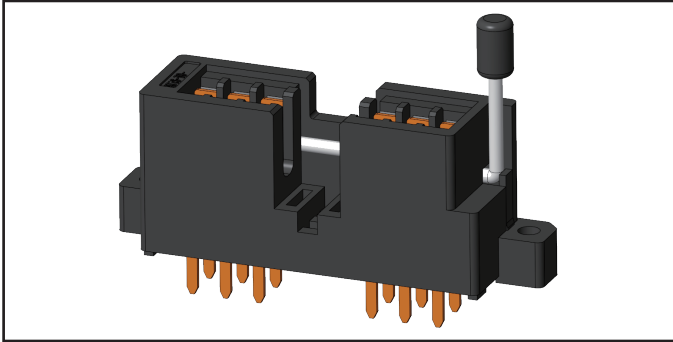

- 材质/Material
 - 主体/Body: PPS+gf30 (Black)
 - 接触/Contact: BeCu
 - 镀覆/Plating: Au plating (Ni-base)
- 电特性/Electrical Characteristics
 - 额定电流/Rated Current: 50A
 - 绝缘电阻/Insulation Resistance: 1000mΩ min. at 500V DC
 - 接触电阻/Contact Resistance: 100mΩ max. at 100mA max
- 其他/Others
 - 使用温度/Operating Temperature Range: -55°C~+175°C
 - 抗疲劳/Anti-Fatigue: 50000 cycle (因测试条件不同结果可能不同/Results may vary depending on test conditions)

产品尺寸/Product Dimensions: (长宽高/LWH, 关键封装尺寸/Critical Package Sizes, 引脚尺寸/Pin Size)

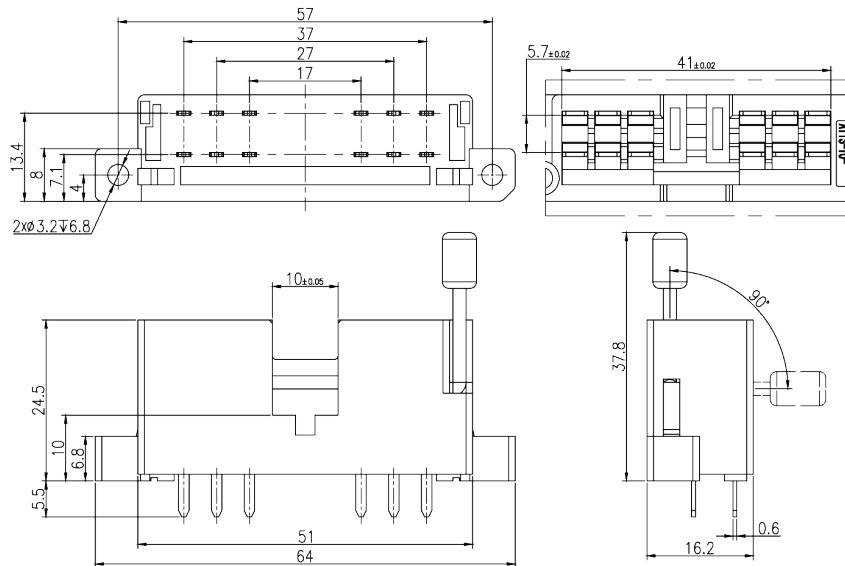

器件封装要求含/Device Packaging Requirements Including

